


# CX-IP1060W




## 技术参数

输入电压范围: AC100-240V, 50/60 Hz  
 功率: 1100W  
 光源:  
 光束端:  
 10 x 60W RGBW LED  
 频闪端:  
 96 x 3W CW LED  
 96 x 3W WW LED  
 96 x 0.5W RGB LED  
 通道: 17/27/99/108/168/170CH  
 控制模式: DMX512/手动/主从模式控制  
 LED预期寿命: 50000小时  
 变焦角度: 3°-25°  
 光通量: 4850 流明  
 频闪: 0-20Hz  
 电源接口: 防水PoWer Connector输入/输出  
 DMX 信号接头: 3芯防水卡侬接头一进一出  
 显示: LCD 显示  
 外壳材质: 铝合金  
 调光: 0-100% 线性调光  
 产品尺寸: 1000x159x403.6mm  
 重量: 31KG  
 IP等级: IP66  
 认证: CE认证

## 照度测试表

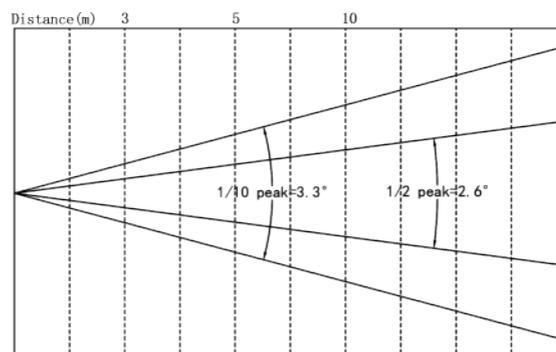

| Distance (m) | 3       | 5       | 10     |
|--------------|---------|---------|--------|
| 红R (lux)     | 4986.1  | 2601.4  | 1065   |
| 绿G (lux)     | 9081.1  | 4954.5  | 2056   |
| 蓝B (lux)     | 1923.4  | 850     | 386.2  |
| 白W (lux)     | 12567   | 6105.4  | 2676.6 |
| 全亮RGBW (lux) | 19040.2 | 10826.7 | 5392   |

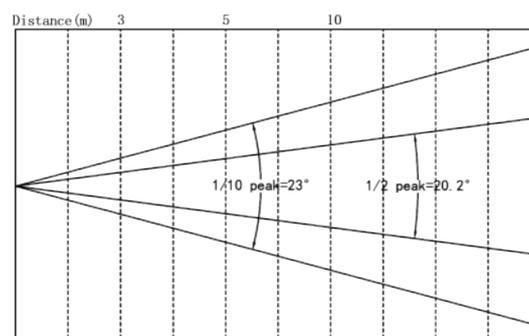

| Distance (m) | 3      | 5     | 10    |
|--------------|--------|-------|-------|
| 红R (lux)     | 675.6  | 260.9 | 65.3  |
| 绿G (lux)     | 1426   | 553.4 | 137.5 |
| 蓝B (lux)     | 279    | 106   | 26.1  |
| 白W (lux)     | 1772   | 680   | 170.8 |
| 全亮RGBW (lux) | 3560.7 | 1120  | 291   |

